

## PKS - HYDRAULIC 2 & 3 WAY PULLER KITS




Capacities from 4.5 to 50 tonnes

Quick set-up time, easy to use

High quality, drop forged steel components

The PKS heavy duty hydraulic puller range is designed for removing stubborn parts such as wheels, gears, sprockets, sleeves, pulleys and other similar items. The range offers a selection of 8 models with pulling capacities up to 50 tonnes. All models are supplied complete with a full set of versatile detachable hydraulic components. All models are safe and easy to operate and avoid the need for heating and hammering.

- >> Working pressure 700 Bar
- >> Multi-purpose hollow piston cylinder (excl. PKS5-2-3)
- >> Complete with all hydraulic components (pump, cylinder, hose, gauge, etc.)
- >> Supplied complete with storage and transport box

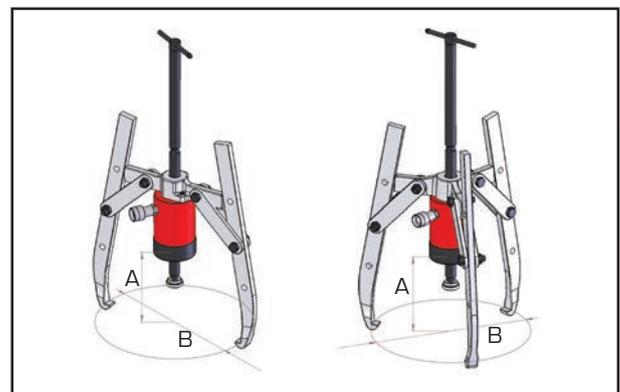

Model number	Capacity tonnes	Type of puller	Cylinder model no.	Pump model no.	Weight kg
<b>PKS5-2-3</b>	4.5	2 & 3 jaw	HSS53	HP110	13.4
<b>PKS10-2-3</b>	10	2 & 3 jaw	HHS102	HP110	20.8
<b>PKS20-2</b>	20	2 jaw	HHS202	HP110	30.8
<b>PKS20-3</b>	20	3 jaw	HHS202	HP110	35.7
<b>PKS30-2</b>	30	2 jaw	HHS302	HP110	44.8
<b>PKS30-3</b>	30	3 jaw	HHS302	HP110	54.4
<b>PKS50-2</b>	50	2 jaw	HHS603	HP227	99.0
<b>PKS50-3</b>	50	3 jaw	HHS603	HP227	121.7
<b>PK202</b>	20	2 jaw beam	*	*	3.0
<b>PK302</b>	30	2 jaw beam	*	*	4.0
<b>PK502</b>	50	2 jaw beam	*	*	7.0

Dimensions in mm		
A	B (min)	B (max)
225	*	240
296	50	350
320	70	480
320	70	480
407	90	580
407	90	580
727	120	920
727	120	920
*	*	*
*	*	*
*	*	*

Note: PK202, PK302 & PK502 are 2-jaw beam only (not complete kit). Dimensions calculated with 15° outward angled puller legs.